

Dowell **CLAD-TRIM** CLADDING FINISH



CLAD-TRIM
CLADDING FINISH

NATIONAL

DOWELL 



CLAD-TRIM Cladding Finish: Allows easy window sealing for a neat finish to any home.

CLAD-TRIM CLADDING FINISH

The new Dowell CLAD-TRIM cladding adapter finish has been designed to accommodate the new trend in window installation of providing a flush finish between the window frame and cladding boards or sheets.

In the past, most systems tucked in behind the external legs of our window frames, however there has been a significant increase in the variety of cladding finishes on the market and a much greater use of battening out before installing the cladding boards or sheets onto the walls.

Previously most systems were directly fixed to the studs externally, therefore keeping the overall wall thickness to a minimum. With the installation of battens, the wall thickness increases which involves increasing the size of the timber reveal around the window and in a lot of cases changing how the cladding boards/sheets abut to our window frames.

This is where our new CLAD-TRIM Cladding Finish benefits building designers in that it allows a wide variety of cladding types to be used without having an adverse impact on how to finish these around the window/door opening. With the proper coordination of wall thickness, reveal size and cladding depth, most cladding application's can achieve a neat and weatherproof flush appearance externally.



Picture framed finish: Timber used varies in size depending on cladding selected and the desired finish.



CLAD-TRIM finish: Silicon sealed to a desired cladding finish.



CLAD-TRIM: The CLAD-TRIM cladding finish **P167712R** can provide a flush finish to the Alfresco door.




Traditional Finish: Cladding is tucked in behind the external leg of the window frame.



Traditional Finish: Tucked cladding finish leaves gaps and doesn't finish neatly.



CLAD-TRIM: The **P14995** and **P14996** are factory fitted to a selected range of Dowell products and provide a neat finish and easy access for caulking/sealing the boards.

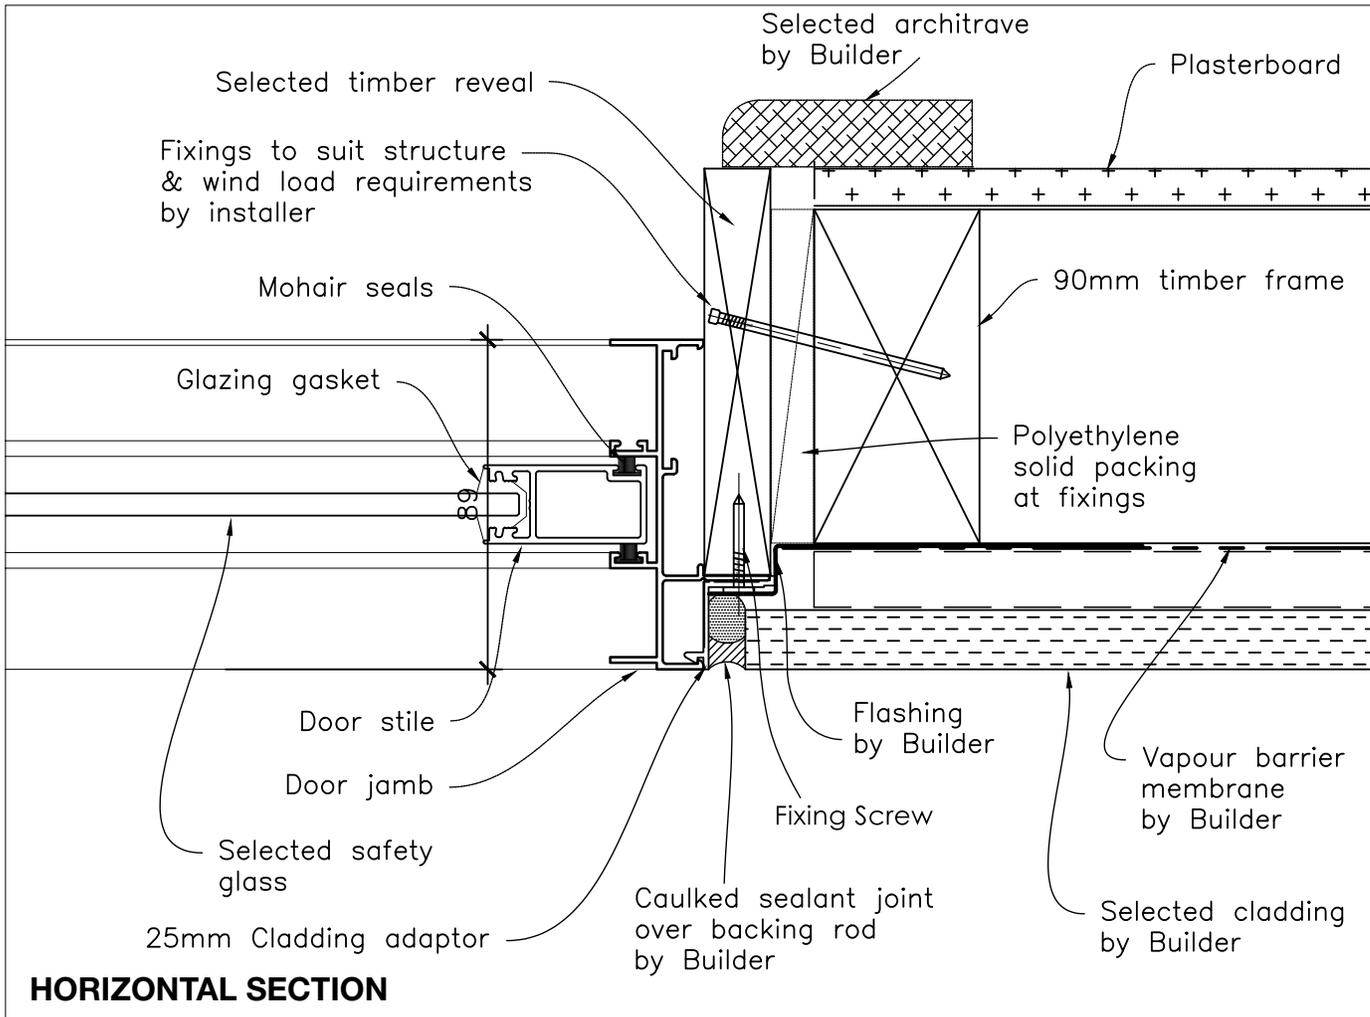

DOWELL INSTALLATION RECOMMENDATIONS

PRODUCT	DOWELL CLAD-TRIM CLADDING ADAPTOR
CONSTRUCTION	CLADDING (SLIDING DOOR DETAILS) HORIZONTAL SECTION: (Right Jamb reveal fixed, with cladding adaptor)
DRAWING ID	DSD-307
VERSION	1
DATE	11/2015
SCALE	1:2

Below: Factory fitting of the Dowell CLAD-TRIM cladding adaptor.



1. Applying sealant to the CLAD-TRIM finish.



2. Positioning CLAD-TRIM finish in place.



3. Securing CLAD-TRIM finish to reveal.



4. Water tight sealing to the joints.





© DOWELL 2018 - CLAD-TRIM CLADDING FINISH

DOWELL 

1300 882 188
www.dowell.com.au